

Micrometer

Blade Micrometers

SERIES 422 — Non-rotating Spindle Type

- The anvil and the spindle have a blade for measuring the groove diameter of shafts, keyways and other hard-to-reach areas.
- Carbide-tipped measuring faces are available.
- Non-rotating spindle type.
- Equipped with Ratchet Stop for constant measuring force.



SPECIFICATIONS

Metric					
Code No.	Range (mm)	Resolution (mm)	Maximum permissible error J_{MPE} (μm)	Parallelism (μm)	Remark
Digimatic					
422-230-30	0 - 25	0.001	±3	3	Type A
422-231-30	25 - 50				
422-232-30	50 - 75		±4	4	Type B
422-233-30	75 - 100				
422-260-30	0 - 25		±3	3	Type C
422-261-30	25 - 50				Type D
422-270-30	0 - 25				
422-271-30	0 - 25				

Inch / Metric					
Code No.	Range (in)	Resolution	Maximum permissible error J_{MPE} (in)	Parallelism (in)	Remark
Digimatic					
422-330-30	0 - 1	0.00005 in / 0.001 mm	±0.00015	0.00015	Type A
422-331-30	1 - 2				
422-332-30	2 - 3		±0.0002	0.0002	Type B
422-333-30	3 - 4				
422-360-30	0 - 1		±0.00015	0.00015	Type C
422-361-30	1 - 2				Type D
422-370-30	0 - 1				
422-371-30	0 - 1				

Metric Quickmike type					
Code No.	Range (mm)	Resolution (mm)	Maximum permissible error J_{MPE} (μm)	Parallelism (μm)	Remark
Digimatic					
422-411-20	0 - 30	0.001	±3	3	Type A
422-412-20	25 - 55				

Inch / Metric Quickmike type					
Code No.	Range (in)	Resolution	Maximum permissible error J_{MPE} (in)	Parallelism (in)	Remark
Digimatic					
422-421-20	0 - 1.2	0.00005 in / 0.001 mm	±0.00015	0.00015	Type A
422-422-20	1 - 2.2				

- Power source: SR44 battery (1 pc.), **938882** included as standard (for operational checks)
- Battery life: Approx. 2.4 years under normal use (for **422-2XX, 3XX**)
Approx. 5 years under normal use (for **422-4XX**)
- Position detection method: Electromagnetic rotary sensor (for **422-2XX, 3XX**)
Electrostatic capacity absolute sensor (for **422-4XX**)
- Standard accessories: Setting standard, 1 pc. (except for measuring range 0 to 25 mm/0 to 30 mm (0 to 1 in/0 to 1.2 in) models), Spanner (**301336**), 1 pc. (for **422-2XX, 3XX**)

Note 1: For functional details, refer to page 02-7. Please note that these models are not water-proof.

Note 2: A heat shield is provided with Digimatic models as standard.

MeasurLink[®] ENABLED
Data Management Software by Mitutoyo

U-WAVE^{fit}

ABSOLUTE[™]

IP65

TÜV Rheinland
CERTIFIED


Drift- and
Wear-
Protected
www.tuv.com
ID: 0000000013

Applicable models:
series 422 Quickmike type

Measurement example



Type and dimensions

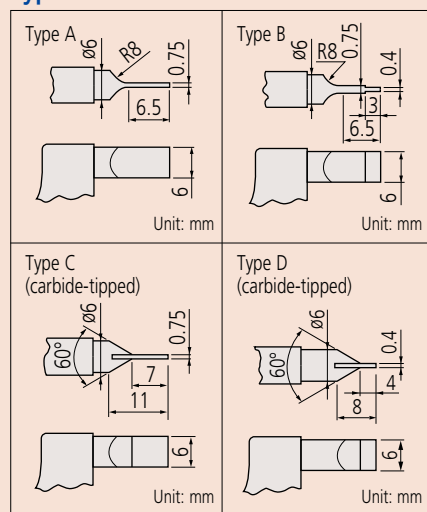

Optional Accessories

Code No.	Type	Description
05CZA662	B	Connection cable (1 m)
05CZA663	B	Connection cable (2 m)
06AFM380B	B	USB Input Tool Direct (2 m)
02AZD790B	B	Connection cable for U-WAVE-T (160 mm)
02AZE140B	B	Connection cable for U-WAVE-T For foot switch
264-622	IP67	U-WAVE-TM*
264-623	Buzzer	U-WAVE-TM*
264-626	IP67	U-WAVE-TMB*
264-627	Buzzer	U-WAVE-TMB*
02AZF310	IP67	Connecting unit for U-WAVE-TM/TMB*

* Only series 422 (except for Quickmike type) can be attached.

